




Prem-I-Air Compac


## PMINISW8W

# High Performance Indoor Climate Control ~ 8,000BTU/HR Cooling Capacity

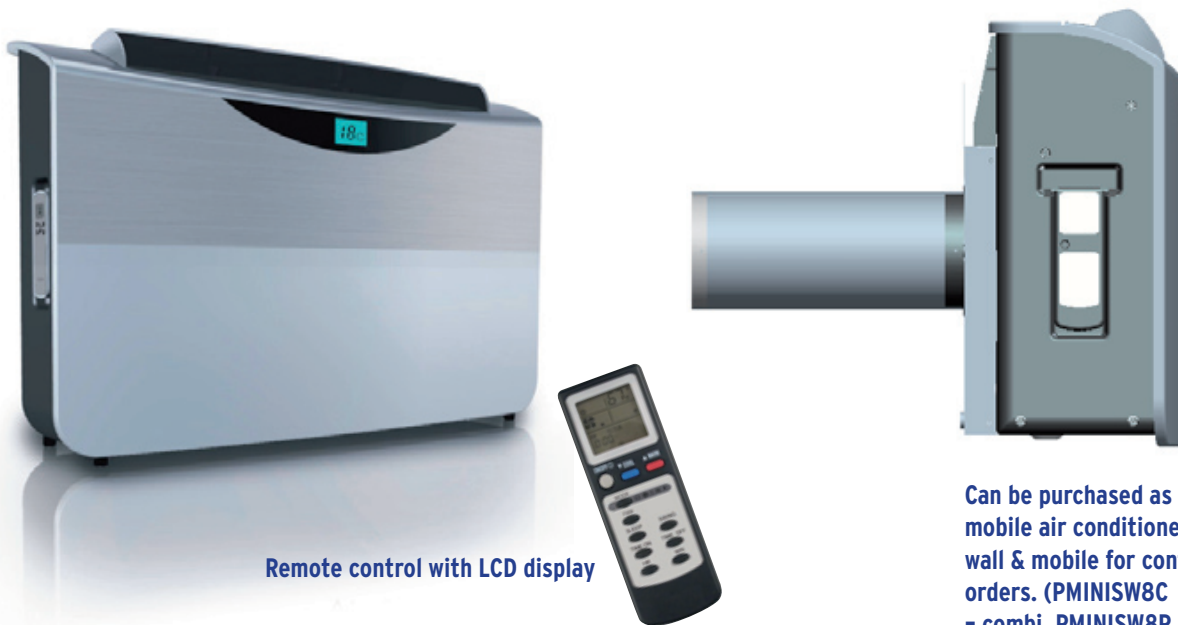

Remote control with LCD display

Can be purchased as a mobile air conditioner or wall & mobile for container orders. (PMINISW8C - combi, PMINISW8P portable only)

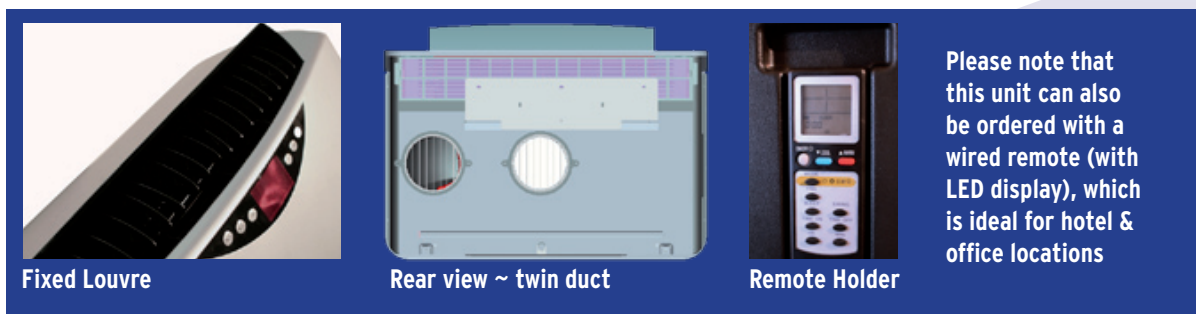

Fixed Louvre

Rear view ~ twin duct

Remote Holder

Please note that this unit can also be ordered with a wired remote (with LED display), which is ideal for hotel & office locations

### ■ Air Conditioning / Heating

- Suitable for free standing & high or low wall installations
- No external unit required
- Reverse cycle heat pump, enables all year round climate control
- Compact console style ~ Suitable for dwarf walls
- Energy efficient high performance rotary compressor
- Dehumidification function built-in
- Fixed louvre
- Quiet operation
- Twin duct system
- Operates without requiring an external condenser or any refrigerant pipe work
- Built-in timer for added convenience

### Technical Specifications

- Cooling capacity: 2.34kW
- Heating capacity: 2.40kW
- Power: Cool 920W  
Heater 960W
- Voltage: 220-240V ~ 50Hz
- Refrigerant: R407C/0.4kg
- N.W: 32kg
- G.W: 36kg
- Energy Efficiency Rating: B
- Noise Level (db): 49
- Airflow Volume (m<sup>3</sup>/h): 320
- Dehumidification Capacity: 25L/day (30°C at 80RH)
- Oscillating Louvre: Fixed
- Control Panel: Remote control only
- Timer (hours): 12
- Product Dimensions  
46.5H x 76.5W x 23.5D cm
- Packaging Dimensions  
53.6H x 93W x 31.5D cm
- Air Intake Pipe (dia mm): 120
- Hot Air Discharge Pipe (dia mm): 130

Ideal for conservatories

Suitable for domestic and light commercial applications

No external unit required